

5059 Satellite

16 x 2+2 Summing Mixer



Operations Manual

Important Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. This apparatus shall not be exposed to dripping or splashing, and no object filled with liquids, such as vases or beer glasses, shall be placed on the apparatus.
16. Do not overload wall outlets and extension cords as this can result in a risk of fire or electric shock.
17. This apparatus has been designed with Class-I construction and must be connected to a mains socket outlet with a protective earthing connection (the third grounding prong).
18. This apparatus has been equipped with a rocker-style AC mains power switch. This switch is located on the rear panel and should remain readily accessible to the user.
19. The MAINS plug or an appliance coupler is used as the disconnect device, so the disconnect device shall remain readily operable.



20. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION: Changes or modifications to this device not expressly approved by Rupert Neve Designs LLC, could void the user's authority to operate the equipment under FCC rules.

21. This apparatus does not exceed the Class A/Class B (whichever is applicable) limits for radio noise emissions from digital apparatus as set out in the radio interference regulations of the Canadian Department of Communications.

ATTENTION — *Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de class A/de class B (selon le cas) prescrites dans le règlement sur le brouillage radioélectrique édicté par les ministere des communications du Canada.*

22. Exposure to extremely high noise levels may cause permanent hearing loss. Individuals vary considerably in susceptibility to noise-induced hearing loss, but nearly everyone will lose some hearing if exposed to sufficiently intense noise for a period of time. The U.S. Government's Occupational Safety and Health Administration (OSHA) has specified the permissible noise level exposures shown in the following chart. According to OSHA, any exposure in excess of these permissible limits could result in some hearing loss. To ensure against potentially dangerous exposure to high sound pressure levels, it is recommended that all persons exposed to equipment capable of producing high sound pressure levels use hearing protectors while the equipment is in operation. Ear plugs or protectors in the ear canals or over the ears must be worn when operating the equipment in order to prevent permanent hearing loss if exposure is in excess of the limits set forth here:

	CAUTION AVIS	
RISK OF ELECTRIC SHOCK. DO NOT OPEN. RISQUE DE CHOC ELECTRIQUE. NE PAS OUVRIR.		
<small>CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED PERSONNEL.</small>		
<small>ATTENTION: POUR EVITER LES RISQUES DE CHOC ELECTRIQUE, NE PAS ENLEVER LE COUVERCLE. AUCUN ENTRETIEN DE PIECES INTERIEURES PAR L'USAGER. CONFIER L'ENTRETIEN AU PERSONNEL QUALIFIE.</small>		
<small>AVIS: POUR EVITER LES RISQUES D'INCENDIE OU D'ELECTROCUTION, NE EXPOSEZ PAS CET ARTICLE A LA PLUIE OU A L'HUMIDITE.</small>		

The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure, that may be of sufficient magnitude to constitute a risk of electric shock to persons.
Le symbole éclair avec point de flèche à l'intérieur d'un triangle équilatéral est utilisé pour alerter l'utilisateur de la présence à l'intérieur du coffret de "voltage dangereux" non isolé d'ampleur suffisante pour constituer un risque d'électrocution.

The exclamation point within an equilateral triangle is intended to alert the user of the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.
Le point d'exclamation à l'intérieur d'un triangle équilatéral est employé pour alerter les utilisateurs de la présence d'instructions importantes pour le fonctionnement et l'entretien (service) dans le livret d'instruction accompagnant l'appareil.

This symbol indicates that this product must not be disposed of with other waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city recycling office or the dealer from whom you purchased the product.

Duration, per day in hours	Sound Level dBA, Slow Response	Typical Example
8	90	Duo in small club
6	92	
4	95	Subway Train
3	97	
2	100	Typical music via head phones
1.5	102	
1	105	Siren at 10 m distance
0.5	110	
0.25 or less	115	Loudest parts at a rock concert

WARNING — To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.


Table of Contents

Introduction	1
Block Diagram	1
5059 Front Panel	2
5059 Rear Panel	3
5059 Features	4
Specifications	6
Limited Warranty	7

Rupert Neve Designs 5059 Satellite Summing Mixer

Thank you for purchasing the Rupert Neve Designs 5059 Satellite Summing Mixer. We hope you enjoy using this product as much as we have enjoyed designing and building it. The 5059 circuit topology is largely based on the designs from our 5088 large-format mixing console, delivering impressive 'console' sonics in a 2U, rack-mountable chassis. The 5059 features 16 inputs each with Level, Pan, Inserts in/out & 'STEREO-2' routing buttons. The 5059 also has 2 stereo buses, each with our Red/Blue Silk circuits & variable Texture control.

5059 Satellite Block Diagram

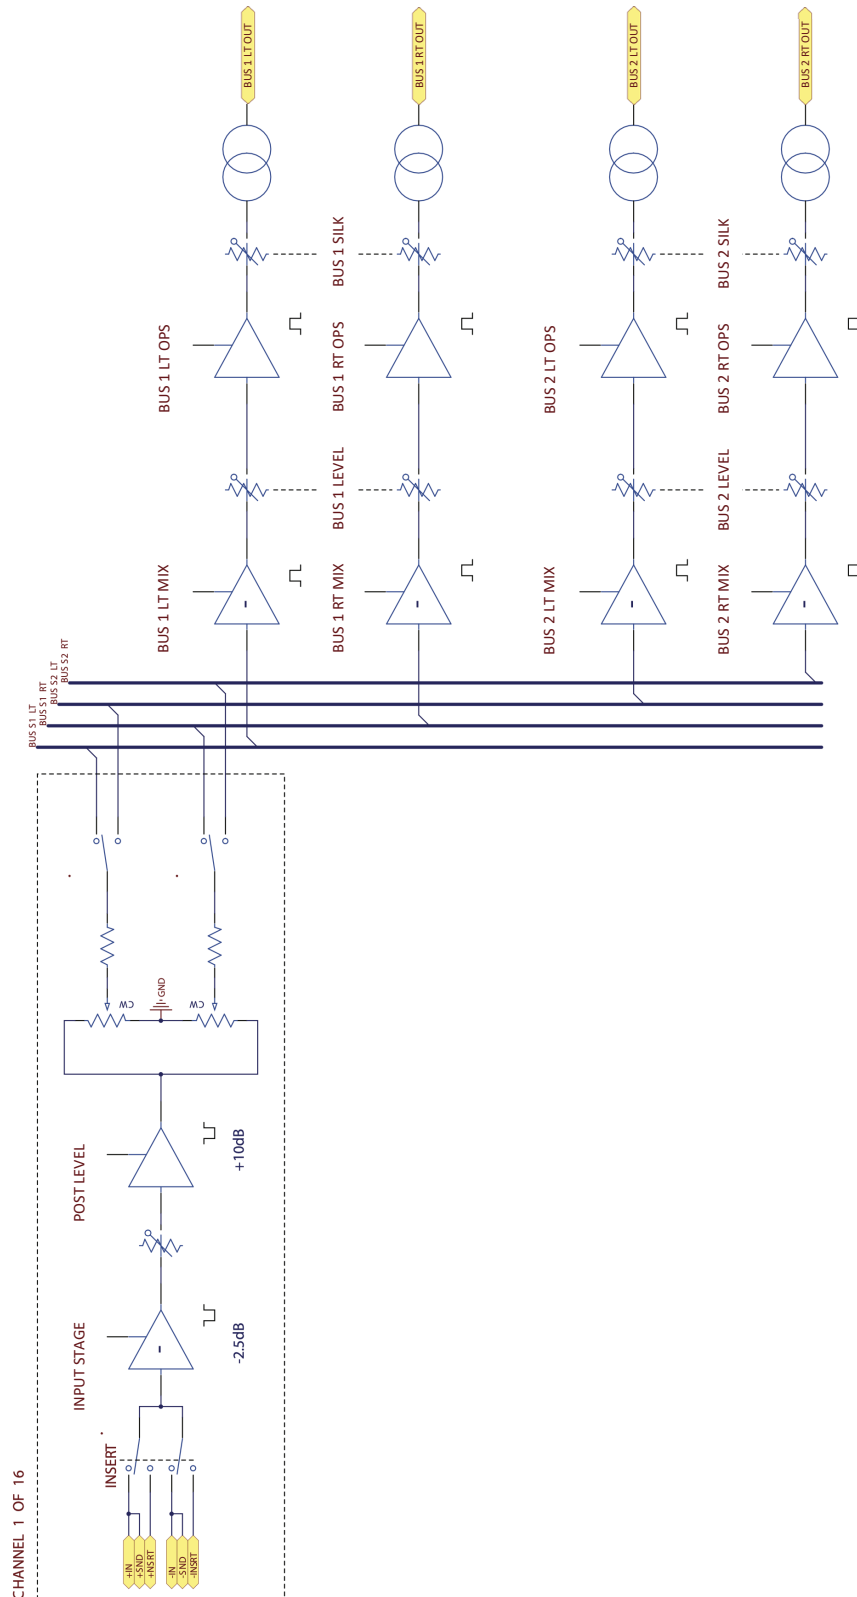


5059 Satellite Front Panel

STEREO
Continuously variable potentiometer that controls the Stereo Bus Output levels within a range of $-\infty$ to 0dB

SIGNAL
LED that illuminates GREEN when signal is present and RED when near clip point

INSERT
Push-button switch that engages the INSERT RETURN inputs on the rear panel for external processing

STEREO 2
Push-button switch that routes the input channel to the 'STEREO 2' Bus

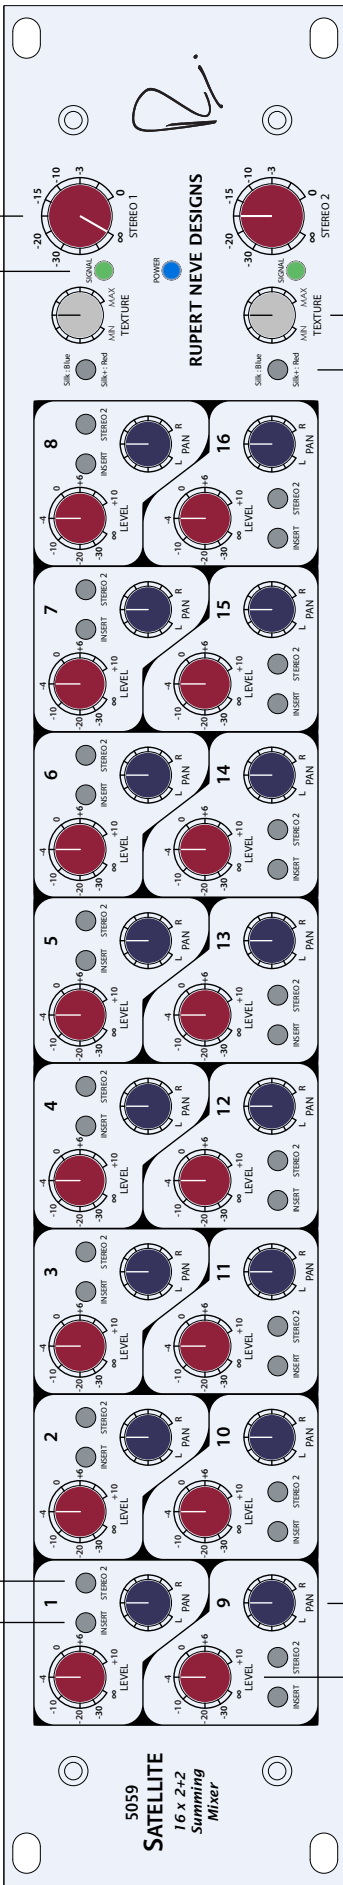


PAN
Center-detent potentiometer that adjusts the Panning Position to either stereo bus

LEVEL
Continuously variable potentiometer that controls the input level within a range of $-\infty$ to +10dB

SILK IN
Push-button switch that toggles through the three available SILK modes: OFF, RED & BLUE

TEXTURE
Continuously variable potentiometer that controls the amount of SILK harmonics when SILK is engaged

5059 Satellite Rear Panel

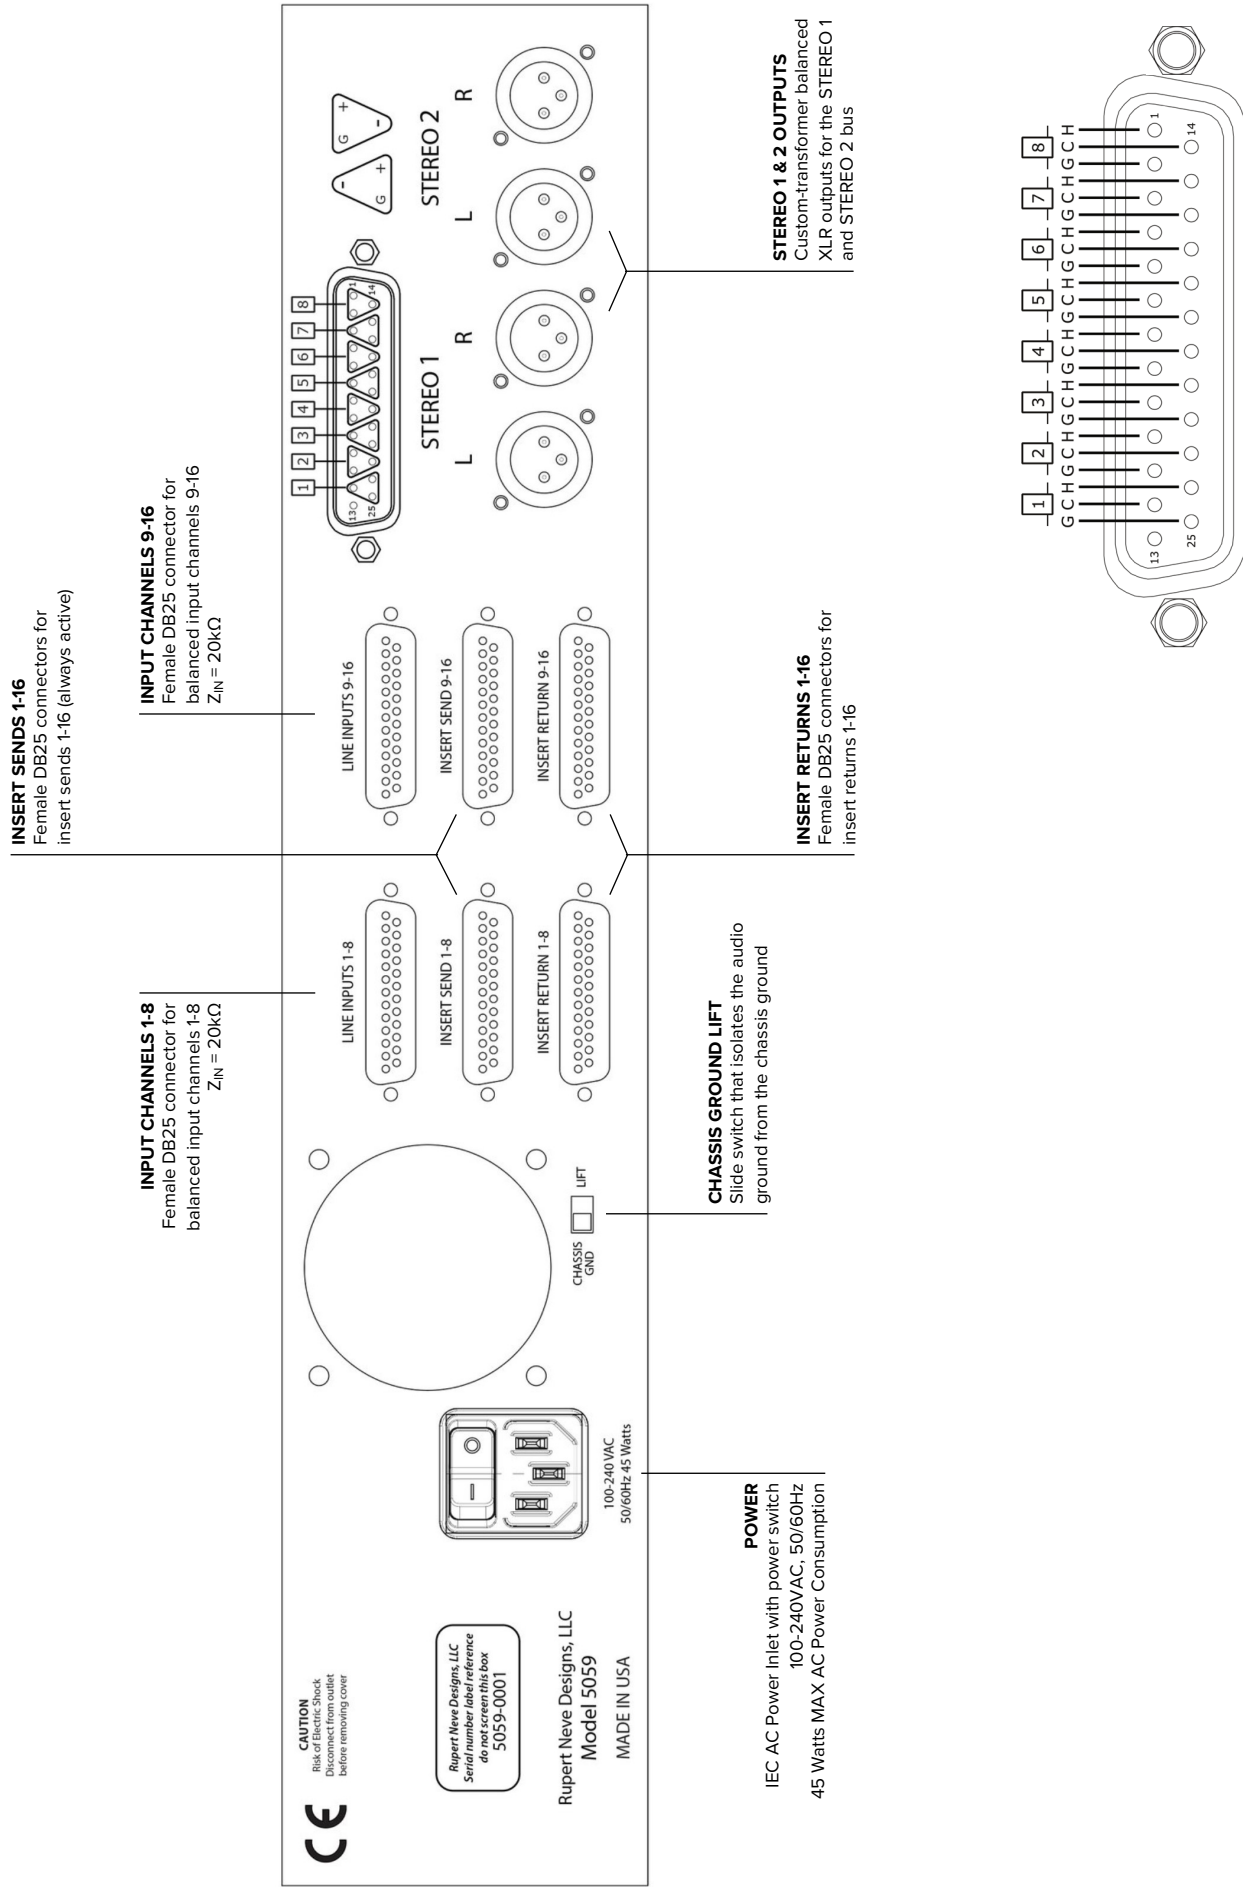

5059 Satellite DB-25 Pin-Out (Tascam)

5059 Satellite Front Panel Features

CHANNEL INPUTS:

LEVEL

Continuously variable potentiometer that controls the input level within a range of –infinity to +10dB.

INSERT

Push-button switch that engages the INSERT RETURN inputs on the rear panel for external processing.

STEREO 2

Push-button switch that routes the corresponding input channel to the ‘STEREO 2’ Bus.

PAN

Center-detent potentiometer that adjusts the Panning Position to either stereo bus.

STEREO BUSES:

SIGNAL

LED meter for each stereo bus that illuminates GREEN when signal is present and RED when near clip point.

STEREO 1 & 2 LEVEL

Continuously variable potentiometers that control each stereo bus output level within a range of –infinity to 0dB.

SILK

Illuminated push-button switch that toggles through the three available SILK modes for each stereo bus: OFF, RED, and BLUE. RED enhances harmonic content in high mid and high frequencies. BLUE enhances harmonic content in low and low mid frequencies.

TEXTURE

Continuously variable potentiometers that control the amount of SILK harmonics added within the transformer output stage of each stereo bus when SILK is engaged.

5059 Satellite Rear Panel Features

POWER

IEC AC power inlet with integrated power switch. 100-240VAC at 50/60Hz. 45 Watts maximum AC power consumption.

CHASSIS GROUND LIFT

Slide switch that isolates the audio ground from the chassis ground.

LINE INPUTS 1-8

Female DB25 connector for balanced input channels 1-8.

LINE INPUTS 9-16

Female DB25 connector for balanced input channels 9-16.

INSERT SENDS 1-8

Female DB25 connectors for insert sends 1-8.

INSERT SENDS 9-16

Female DB25 connectors for insert sends 9-16.

**** NOTE: The Insert Sends on the 5059 Satellite are always active. ****

INSERT RETURNS 1-8

Female DB25 connectors for insert returns 1-8.

INSERT RETURNS 9-16

Female DB25 connectors for insert returns 9-16.

STEREO 1 & 2 OUTPUTS

Rupert Neve Designs custom-transformer balanced XLR outputs for the STEREO 1 and STEREO 2 bus.

Specifications

Input Impedance	20,000 ohms
Noise (IEC A-weighted)	
Bus Outputs	-106 dBV
Single Channel assigned @ $-\infty$	-104 dBV
Single Channel assigned @ Unity Gain	-103 dBV
Single Channel assigned @ +10 dB (un-weighted, 22 Hz-22 kHz)	-100 dBV
Bus Outputs	
Single Channel assigned @ $-\infty$	-101 dBV
Single Channel assigned @ Unity Gain	-100 dBV
Single Channel assigned @ +10 dB	-97 dBV
Maximum Output Level	
Summing Buses to XLR Outputs (20Hz to 40kHz)	+26 dBu
Single Channel to Stereo Bus (20Hz to 40kHz)	-24.5 dBV
Frequency Response (100k load)	
<20Hz to 20 kHz	+/- 0.1 dB
<3.5Hz to 185 kHz	-3 dB
Signal to Noise Ratio	
+20 dBu Output (un-weighted, 22 Hz-22 kHz)	116 dB
+20 dBu Output (IEC A-weighted)	119 dB
+4 dBu Output (un-weighted, 22 Hz-22 kHz)	100 dB
+4 dBu Output (IEC A-weighted)	103 dB
THD+N	
+20 dBu at 1 kHz	better than 0.003 %
+20 dBu at 20 Hz	better than 0.005 %
THD+N (SILK ENGAGED)	
Blue Silk: +20 dBu at 100 Hz (Texture control @ 50%)	0.2 % typical
Blue Silk: +20 dBu at 100 Hz (Texture control @ MAX)	0.65 % typical
Red Silk: +20 dBu at 100 Hz (Texture control @ 50%)	0.1 % typical
Red Silk: +20 dBu at 100 Hz (Texture control @ MAX)	0.35 % typical
Product Dimensions (W x D x H)	19" (48.3 cm) x 3.5" (20.63 cm) x 1.75" (4.5 cm)
Shipping Dimensions (W x D x H)	22" (61 cm) x 17" (33 cm) x 8" (10.2 cm)
Shipping Weight	25 lbs. (4.1 kg)

PRODUCT WARRANTY

Rupert Neve Designs warrants this product to be free from defects in materials and workmanship for a period of three (3) years from date of purchase, and agrees to remedy any defect identified within such three year period by, at our option, repairing or replacing the product.

LIMITATIONS AND EXCLUSIONS

This warranty, and any other express or implied warranty, does not apply to any product which has been improperly installed, subjected to usage for which the product was not designed, misused or abused, damaged during shipping, damaged by any dry cell battery, or which has been altered or modified in any way. This warranty is extended to the original end user purchaser only. A purchase receipt or other satisfactory proof of date of original purchase is required before any warranty service will be performed. THIS EXPRESS, LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, TO THE EXTENT ALLOWED UNDER APPLICABLE STATE LAW. IN NO EVENT SHALL RUPERT NEVE DESIGNS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT. Some states do not allow the exclusion or limitation of consequential damages or limitations on how long an implied warranty lasts, so this exclusion may not apply to you.

WARRANTY SERVICE

If you suspect a defect in this product, please contact our support staff for troubleshooting by phone (512-847-3013) or email (service@rupertneve.com). If it is determined that the device is malfunctioning, we will issue a Return Material Authorization and provide instructions for shipping the device to our service department.



Rupert Neve Designs

PO Box 1969

Wimberley TX 78676

www.rupertneve.com

tel: +1 512-847-3013

fax: +1 512-847-8869

775-00015 Rev C2